

## 50T Series Transmitters

Model 53G/A gauge/absolute  
flush diaphragm pressure transmitter

Ranges: -100 to 40000kPa

-1 to 400bar

-14.5 to 6000psi

**IndustrialIT**  
enabled™

- Base accuracy :  $\leq 0.25\%$  (BFSL)
- Piezoresistive thin film technology
- Process connection selection
- Wide choice of ranges
- Good overpressure performance without calibration change
- Excellent long term stability
- CE - conformity



**50T Series**  
**Reliable sensors for**  
**pressure measurements**

## Description

50T series transmitter are suitable for liquid, gas and vapour application. An all stainless steel construction with flush diaphragm connection makes these transmitters ideally suited for measurements on viscous and heavy fluids such as paint, pulp and paper, and most uses in the refrigeration field. Those transmitters are based on a piezoresistive sensing element.

## Functional Specifications

### Range, span and pressure limits

METRIC RANGES				
Compound ranges (kPa/bar)	Gauge ranges (kPa/bar)	Absolute ranges (kPa/bar)	Overpressure	
			MPa	bar
-100 to 0 / -1 to 0 (Note 1)	0 to 100 / 0 to 1 (Note 1)	0 to 100 / 0 to 1 (Note 1)	0.3	3
-100 to 60 / -1 to 0.6	0 to 160 / 0 to 1.6	0 to 160 / 0 to 1.6	0.6	6
-100 to 100 / -1 to 1			0.6	6
-100 to 150 / -1 to 1.5	0 to 250 / 0 to 2.5	0 to 250 / 0 to 2.5	0.6	6
-100 to 300 / -1 to 3	0 to 400 / 0 to 4	0 to 400 / 0 to 4	1.2	12
-100 to 500 / -1 to 5	0 to 600 / 0 to 6	0 to 600 / 0 to 6	1.2	12
-100 to 900 / -1 to 9	0 to 1000 / 0 to 10	0 to 1000 / 0 to 10	2.5	25
-100 to 1500 / -1 to 15	0 to 1600 / 0 to 16	0 to 1600 / 0 to 16	5	50
	0 to 2000 / 0 to 20	0 to 2000 / 0 to 20	5	50
-100 to 2400 / -1 to 24	0 to 2500 / 0 to 25	0 to 2500 / 0 to 25	5	50
-100 to 3900 / -1 to 39	0 to 4000 / 0 to 40		12	120
	0 to 6000 / 0 to 60		12	120
	0 to 10000 / 0 to 100		25	250
	0 to 16000 / 0 to 160		50	500
	0 to 25000 / 0 to 250		50	500
	0 to 40000 / 0 to 400		60	600

IMPERIAL RANGES			
Compound ranges (psi)	Gauge ranges (psi)	Absolute ranges (psi)	Overpressure psi
-14.5 to 0 (Note 1)	0 to 15 (Note 1)	0 to 15 (Note 1)	43.5
-14.5 to 15	0 to 30	0 to 30	87
-14.5 to 30	0 to 40	0 to 40	87
-14.5 to 60	0 to 60	0 to 60	116
-14.5 to 100	0 to 100	0 to 100	174
	0 to 150	0 to 150	360
-14.5 to 200	0 to 200	0 to 200	464
-14.5 to 300	0 to 300	0 to 300	725
	0 to 400		725
	0 to 600		1160
	0 to 1000		1740
	0 to 1500		2900
	0 to 2000		4640
	0 to 3000		4640
	0 to 4000		7250
	0 to 6000		8700

**Note 1:** G 3/4 A and G 1 A connections only.

### Fatigue life

greater than 100 million cycles (full scale)

### Response time

≤1ms

### Vibration

10g peak sinusoidal from 20 to 2000Hz

## Temperature limits

### Ambient

-20°C and +85°C (-4°F and +185°F)  
(can be limited by intrinsically safe application)  
Upper ambient limit for cables: +50°C (+122°F)

### Process

-25°C and +125°C (-13°F and +257°F)

### Compensated

-20°C and +80°C (-4°F and +176°F)

## Electrical characteristics

### Power supply

The transmitter operates from 12 up to 36Vdc and is protected against reverse polarity connection.  
For intrinsically safe application power supply must not exceed 28Vdc.

### Load limitations

total loop resistance:

$$R(\Omega) \frac{\text{Supply voltage} - 12}{0.02}$$

### Output signal

4 to 20mA; 0 to 10Vdc

### Insulation resistance

> 100MΩ @ 50Vdc

## Performance specifications

Unless otherwise specified, errors are quoted as % of full scale

### Accuracy rating

≤ 0.25% of BFSL, including combined effects of linearity, hysteresis and repeatability.

### Operating influences

#### Ambient temperature

between the limits of -20°C to +80°C (-4 to +176°F)  
Thermal error: 2% max

#### EMI/RFI

Meets EN50081-2 for emission and EN50082-2 for susceptibility

#### Stability

< 0.30% over a twelve-month period

## Physical Specification

(Refer to ordering information sheets for variant availability related to specific model or versions code)

### Materials

#### Process wetted parts

- O-ring: Nitril (NBR) or Viton (FKM)
- Flush diaphragm: AISI 316L (1.4404) stainless steel

#### Housing

AISI 304 / 1.4301 stainless steel

#### Tagging

Printed label stucked to the housing

#### Filling oil

Silicone oil

## Environmental protection

The transmitter is dust and sand tight

### Enclosure class

- IP65 with 4-pin DIN 43650 connector
- IP67 with cable gland

### Hazardous atmospheres (4-20mA only)

- INTRINSIC SAFETY/EUROPE:  
ATEX/Baseefa approval  
II 1 G EEx ia IIC T4 (-20°C ≤ Ta ≤ +75°C)

### Surge protection

Fast transient (Burst) immunity level: 2kV

### Process connections

G 1/2in, G 3/4in, G 1in according to DIN 3852

### Electrical connections

4-pin connector ISO4400 / DIN 43650  
Cable gland (PG 9) + 2m cable


### Mass

4-pin connector ISO 4400 / DIN 43650: 225g  
Add 150g for PVC cable (2m) + cable gland (PG9)

### Packing


Carton for connector version.  
Plastic envelope for versions with cable.

**MOUNTING DIMENSIONS** (not for construction unless certified) - dimensions in mm (in)

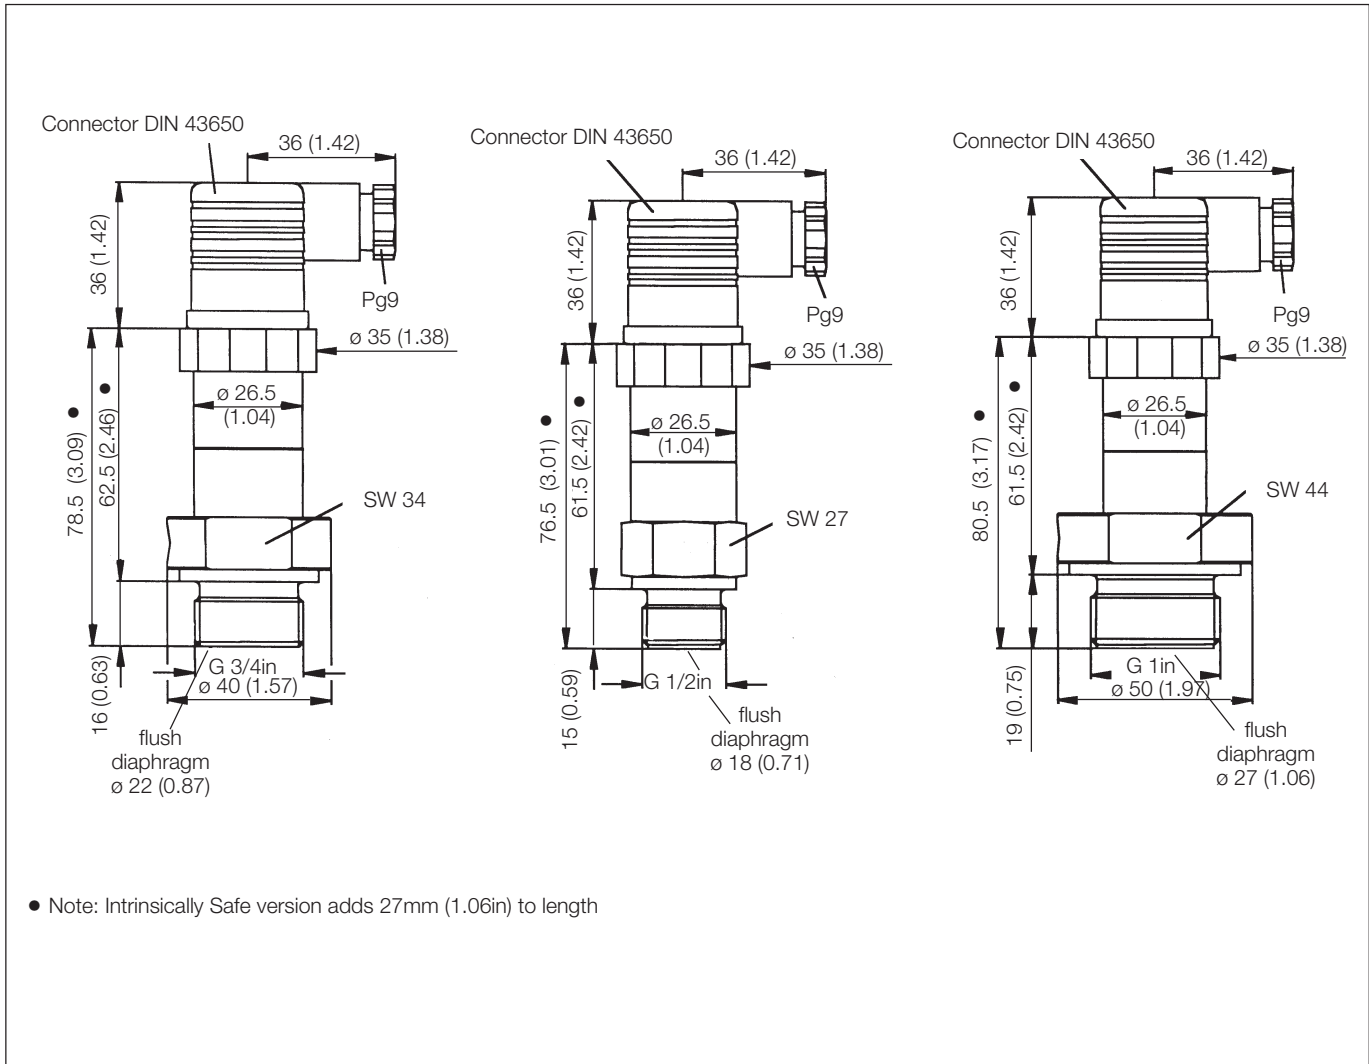


## Electrical connections

### 4-20mA output

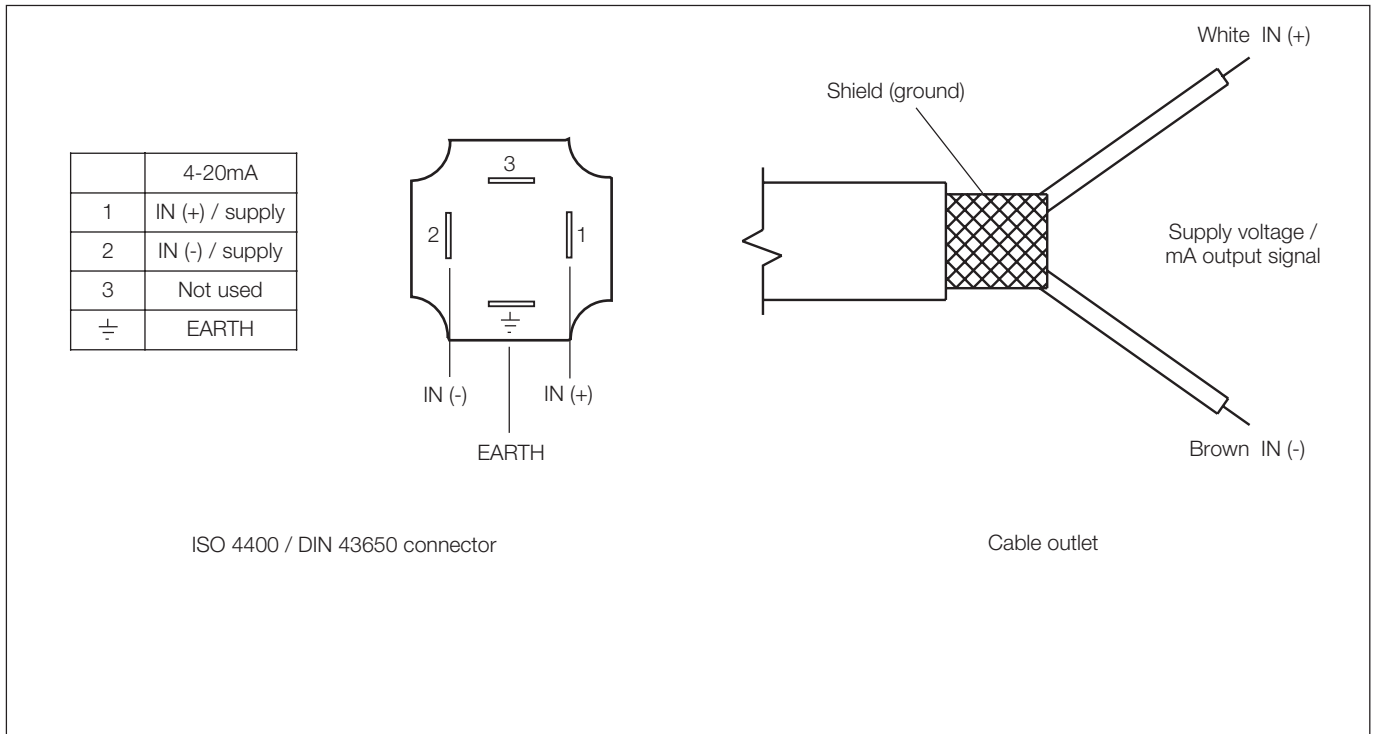

### 0-10V output

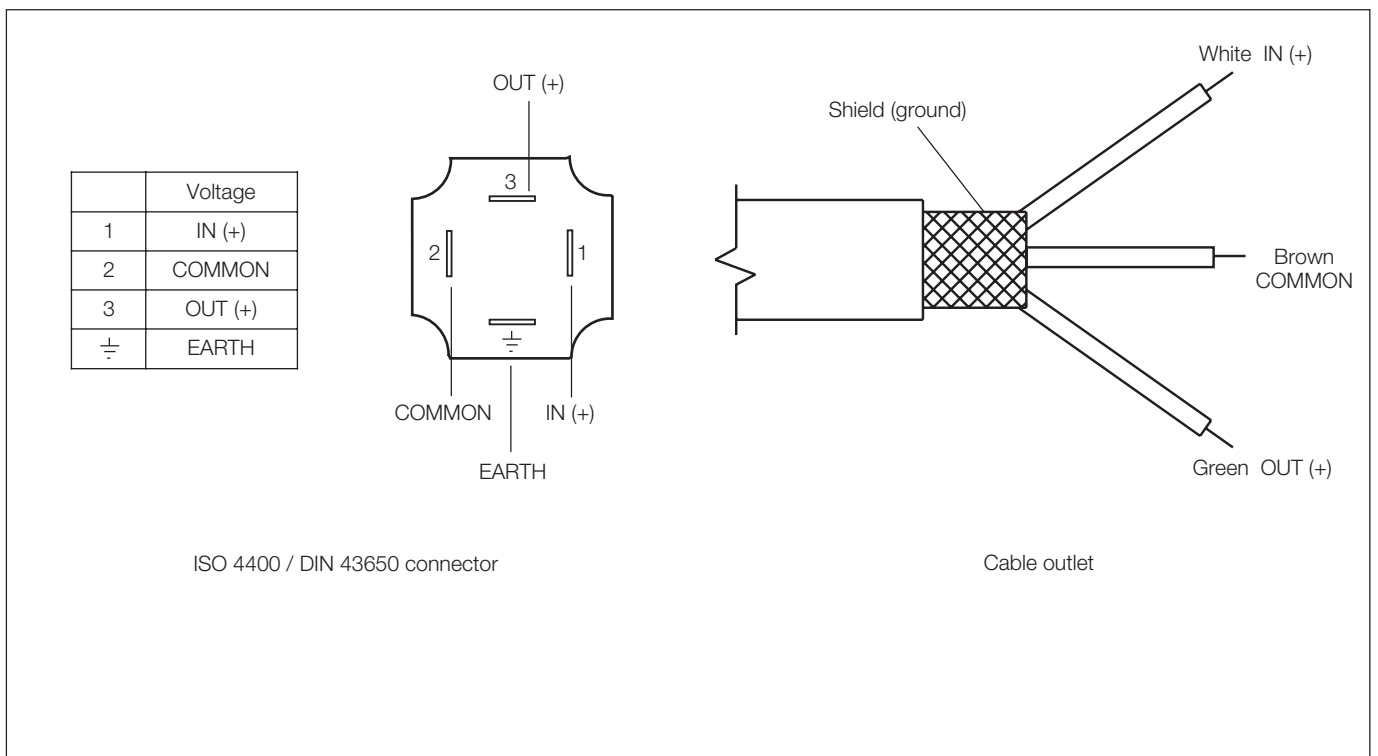

**BASIC ORDERING INFORMATION model 53G/A Transmitter**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> – 1 <sup>st</sup> to 3 <sup>rd</sup> characters			X	XX	X	X	X	X	X	X	X	X
Fixed Range Gauge Pressure Transmitter	5	3 G										
Fixed Range Absolute Pressure Transmitter	5	3 A										
<b>Measuring units</b> – 4 <sup>th</sup> character												
kPa			K									
bar			B									
psi			E									
<b>Range</b> – 5 <sup>th</sup> and 6 <sup>th</sup> character												
-100 to 0kPa (Notes 1, 2)	-1 to 0bar (Notes 1, 2)	-14.5 to 0psi (Notes 1, 2)		11								
-100 to 60kPa (Note 2)	-1 to 0.6bar (Note 2)	-14.5 to 15psi (Note 2)		12								
-100 to 100kPa (Note 2)	-1 to 1bar (Note 2)			54								
-100 to 150kPa (Note 2)	-1 to 1.5bar (Note 2)	-14.5 to 30psi (Note 2)		13								
-100 to 300kPa (Note 2)	-1 to 3bar (Note 2)	-14.5 to 60psi (Note 2)		14								
-100 to 500kPa (Note 2)	-1 to 5bar (Note 2)	-14.5 to 100psi (Note 2)		15								
-100 to 900kPa (Note 2)	-1 to 9bar (Note 2)	-14.5 to 200psi (Note 2)		16								
-100 to 1500kPa (Note 2)	-1 to 15bar (Note 2)	-14.5 to 300psi (Note 2)		17								
-100 to 2400kPa (Note 2)	-1 to 24bar (Note 2)			18								
-100 to 3900kPa (Note 2)	-1 to 39bar (Note 2)			19								
		0 to 15psi (Note 1)		20								
		0 to 30psi		23								
0 to 100kPa (Note 1)	0 to 1bar (Note 1)	0 to 40psi		24								
0 to 160kPa	0 to 1.6bar	0 to 60psi		25								
0 to 250kPa	0 to 2.5bar	0 to 100psi		26								
0 to 400kPa	0 to 4bar	0 to 150psi		27								
0 to 600kPa	0 to 6bar	0 to 200psi		28								
0 to 1000kPa	0 to 10bar	0 to 300psi		29								
0 to 1600kPa	0 to 16bar	0 to 400psi (Note 2)		31								
0 to 2000kPa	0 to 20bar			53								
0 to 2500kPa	0 to 25bar	0 to 600psi (Note 2)		32								
0 to 4000kPa (Note 2)	0 to 40bar (Note 2)	0 to 1000psi (Note 2)		33								
0 to 6000kPa (Note 2)	0 to 60bar (Note 2)	0 to 1500psi (Note 2)		34								
0 to 10000kPa (Note 2)	0 to 100bar (Note 2)	0 to 2000psi (Note 2)		35								
0 to 16000kPa (Note 2)	0 to 160bar (Note 2)	0 to 3000psi (Note 2)		36								
0 to 25000kPa (Note 2)	0 to 250bar (Note 2)	0 to 4000psi (Note 2)		37								
0 to 40000kPa (Note 2)	0 to 400bar (Note 2)	0 to 6000psi (Note 2)		38								
<b>Pressure connection</b> - 7 <sup>th</sup> character												
G 1/2in DIN 3852						3						
G 3/4in DIN 3852						B						
G 1in DIN 3852						D						
<b>Gasket</b> - 8 <sup>th</sup> character												
NBR (Nitril)	(Not applicable with ranges equal or lower than 6000kPa, 60bar, 1000psi)					B						
FKM (Viton)	(Not applicable with ranges equal or greater than 10000kPa, 100bar, 1500psi)					V						
<b>Output signal</b> - 9 <sup>th</sup> character												
4 - 20mA						3						
0 - 10V						2						
<b>Electrical certification</b> - 10 <sup>th</sup> character												
General purpose									1			
ATEX Group II Category 1G - Intrinsic Safety EEx ia	(Note 3)								2			
<b>Electrical connection</b> - 11 <sup>th</sup> character												
Cable gland + 2 meter cable										2		
4-pole connector ISO 4400/DIN43650										4		
<b>Surge protection</b> - 12 <sup>th</sup> character												
Yes (fitted as standard)											2	
<b>Calibration certificate</b> - 13 <sup>th</sup> character												
Yes (provided as standard)												2
14 <sup>th</sup> character												
Use code												2

Note 1: Not available with pressure connection code 3

Note 2: Not available with absolute transmitter, base model code 53A.

Note 3: Not available with 0-10V output signal code 2



---

ABB has Sales & Customer Support  
expertise in over 100 countries worldwide

[www.abb.com/instrumentation](http://www.abb.com/instrumentation)

The Company's policy is one of continuous product  
improvement and the right is reserved to modify the  
information contained herein without notice.

Printed in Italy (02.05)

© ABB 2005



**ABB Ltd**  
Howard Road, St. Neots  
Cambridgeshire, PE19 3EU  
UK  
Tel: +44(0)1480 475321  
Fax: +44(0)1480 217948

**ABB Inc.**  
125 E. County Line Road  
Warminster, PA 18974  
USA  
Tel: +1 215 674 6000  
Fax: +1 215 674 7183

**ABB SACE spa**  
Business Unit Instrumentation  
Via Statale 113  
22016 Lenno (CO) Italy  
Tel: +39 0344 58111  
Fax: +39 0344 56278